

Compendium of MA Series

Multi-mounting accessories
FA Type SDB Type LB Type

Rolling packed structure
Front and back cover and stainless steel block adopt riveted rolling packed structure to form a reliable connection.

Seven bore size are available
Bore size: 16, 20, 25, 32, 40, 50, 63

Three kinds of back cover type
CA: Pivot type U: Flat-end type CM: Round-end type

Multi-type cylinder
MA: Mini cylinder(Double acting)
MSA: Mini cylinder (Single acting_push) MTA: Mini cylinder (Single acting_pull)
MAD: Mini cylinder(Double rod)
MAJ: Mini cylinder(Adjustable stroke)
MAR: Mini cylinder(Double acting with cushion)
MAC: Mini cylinder(Double acting with cushion)
MACD: Mini cylinder(Double rod with cushion)
MACJ: Mini cylinder(Adjustable stroke with cushion)

Two kinds of cushion type
Variable cushion or Bumper

Criteria for selection: Cylinder thrust

Unit: Newton(N)

Bore size	Rod size	Acting type	Pressure area(mm ²)	Operating pressure(MPa)							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	
16	6	Single acting Push side	201.0	-	-	20.1	40.2	60.3	80.4	100.5	
		Double acting Push side	172.7	-	-	11.6	28.9	46.2	63.4	80.7	
		Single acting Pull side	201.0	20.1	40.2	60.3	80.4	100.5	120.6	140.7	
		Double acting Pull side	172.7	17.3	34.5	51.8	69.1	86.4	103.6	120.9	
20	8	Single acting Push side	314.0	-	15.7	47.1	78.5	109.9	141.3	172.7	
		Double acting Push side	263.8	-	5.7	32.0	58.4	84.8	111.2	137.5	
		Single acting Pull side	314.0	31.4	62.8	94.2	125.6	157.0	188.4	219.8	
		Double acting Pull side	263.8	26.4	52.8	79.1	105.5	131.9	158.3	184.7	
25	10	Single acting Push side	490.6	-	24.6	73.7	122.8	171.8	220.9	269.9	
		Double acting Push side	412.1	-	8.9	50.1	91.4	132.6	173.8	215.0	
		Single acting Pull side	490.6	49.1	98.1	147.2	196.2	245.3	294.4	343.4	
		Double acting Pull side	412.1	41.2	82.4	123.6	164.8	206.1	247.3	288.5	
32	12	Single acting Push side	804.3	-	40.2	120.6	200.9	281.3	361.7	442.1	
		Double acting Push side	691.2	-	17.6	86.6	155.7	224.8	293.9	363.0	
		Single acting Pull side	804.3	80.4	160.9	241.3	321.7	402.2	482.6	563.0	
		Double acting Pull side	691.2	69.1	138.2	207.4	276.5	345.6	414.7	483.8	
40	16	Single acting Push side	1256.6	-	62.8	188.4	314.0	439.6	565.2	690.8	
		Double acting Push side	1055.6	-	22.6	128.1	233.6	339.1	444.6	550.1	
		Single acting Pull side	1256.6	125.7	251.3	377.0	502.6	628.3	754.0	879.6	
		Double acting Pull side	1055.6	105.6	211.1	316.7	422.2	527.8	633.4	738.9	
50	16	Single acting Push side	1962.5	-	196.3	392.5	588.8	785.0	981.3	1177.5	1373.8
		Double acting Push side	1761.5	-	176.2	352.3	528.5	704.6	880.8	1056.9	1233.1
		Single acting Pull side	3115.7	311.6	623.1	934.7	1246.3	1557.9	1869.4	2181.0	
		Double acting Pull side	2914.7	291.5	582.9	874.4	1165.9	1457.4	1748.8	2040.3	


Installation and application



- When load changes in the work, the cylinder with abundant output capacity shall be selected.
- Relative cylinder with high temperature resistance or corrosion resistance shall be chosen under the condition of high temperature or corrosion.
- Necessary protection measure shall be taken in the environment with higher humidity, much dust or water drops, oil dust and welding dregs.
- Dirty substances in the pipe must be eliminated before cylinder is connected with pipeline to prevent the entrance of particles into the cylinder.
- The medium used by cylinder shall be filtered to 40µm or below.
- Anti-freezing measure shall be adopted under low temperature environment to prevent moisture freezing.
- The cylinder shall be carried out test run without load before application. Prior to run, buffer shall be turned to the minimum and gradually released to avoid the damage on cylinder caused by excessive impact.
- To avoid side load, otherwise, piston rod will be bent and deformed and damage the thread at the end of the rod. Single-acting type can not be added in return.
- If the cylinder is dismantled and stored for a long time, please to conduct anti-rust treatment to the surface. Anti-dust caps shall be added in air inlet and outlet ports. The front and back cover can not be dismantled, which shall be especially noticed.



Symbol

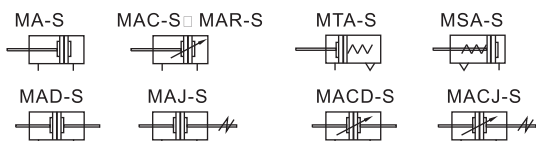

Product feature

- Standard cylinder manufactured by our enterprise.
- Piston adopts heterogeneous two-way seal structure. It has compact size and has the function of grease reservation.
- Front cover has fixed bumper which can reduce the impact of direction change of the cylinder.
- There are several modes of back cover, which makes the installation of cylinder more convenient.
- Front and back cover and stainless steel block adopt riveted rolling packed structure to form a reliable connection.
- The cylinder body has stainless steel pipes with high precision to produce high strength and corrosion resistance.
- There are cylinders and mounting accessories with several specifications for your choice.
- All cylinders of this series have magnet.

Ordering code

MA	20 × 50	S	CM	<input type="checkbox"/>	<input type="checkbox"/>
MAD	20 × 50	S		<input type="checkbox"/>	<input type="checkbox"/>
MAJ	20 × 50-20	S		<input type="checkbox"/>	<input type="checkbox"/>
MAR U	20 × 50	S			<input type="checkbox"/>

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Model	② Front cover	③ Bore size	④ Stroke	⑤ Adjustable St.	⑥ Magnet	⑦ Back cover	⑧ Mounting type[Note1]	⑨ Thread type[Note2]
MA: Mini cylinder(Double acting) MAC: Mini cylinder (Double acting with cushion) MSA: Mini cylinder(Single acting_push) MTA: Mini cylinder(Single acting_pull)	No this code	Model	Refer to stroke table for details	No this code	S: With magnet	CA: Pivot type U: Flat-end type CM: Round-end type	Blank: No accessories FA: FA type SDB: SDB type LB: LB type	Blank: PT G: G T: NPT
MAD: Mini cylinder(Double rod) MACD: Mini cylinder (Double rod with cushion)		Bore size						
MAJ: Mini cylinder(Adjustable stroke) MACJ: Mini cylinder (Adjustable stroke with cushion)		MA 16 MSA 20 MTA 25 MAD 32 MAJ 40						
MAR: Mini cylinder (Double acting with cushion)		MAC 16 MACD 16 MAC 20 MAC 25 MAR 32 MACD 40 MACJ 50 63						
	F: Front mounting U: Up mounting						No this code	

[Note1] Please refer to page 100~101 for accessory parts.

[Note2] Standard thread is blank here.

Specification

Bore size(mm)	16	20	25	32	40	50	63
Acting type	MSA/MTA		Single acting				-
	MA/MAD/MAJ		Double acting				-
	MAR		-	Double acting			
	MAC/MACD/MACJ		Double acting with cushion				
Fluid	Air(to be filtered by 40µm filter element)						
Operating pressure	Double acting		0.15~1.0MPa(22~145psi)(1.5~10.0bar)				
	Single acting		0.2~1.0MPa(28~145psi)(2.0~10.0bar)				
Proof pressure	1.5MPa(215psi)(15bar)						
Temperature °C	-20~70						
Speed range mm/s	Double acting: 30~800 Single acting: 50~800						
Stroke tolerance	0~150 ^{+1.0} >150 ^{+1.5}						
Cushion type	MAC/MACD/MACJ Series: Variable cushion; Other series: Bumper						
Port size [Note1]	M5×0.8		1/8"			1/4"	


[Note1] PT thread, G thread thread and NPT thread are available.
Add) Refer to P353 for detail of sensor switch.

Stroke

Bore size (mm)	Standard stroke (mm)																Max. std. stroke	Max. stroke							
MA/MAC	16	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300	350	400	450	500	500	600
MA	25	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300	350	400	450	500	500	800
MAC	32	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300	350	400	450	500	500	800
MAR	40	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300	350	400	450	500	500	800
MAC	50	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300	350	400	450	500	500	800
MAR	63	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300	350	400	450	500	500	800
MAD	16	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300					300	-
MAJ	20	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300					300	-
MACD	25	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300					300	-
MACJ	32	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300	350	400	450	500	500	-
MACD	40	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300	350	400	450	500	500	-
MACJ	50	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300	350	400	450	500	500	-
MSA	63	10	15	20	25	30	40	50	60	75	80	100	125	150	160	175	200	250	300	350	400	450	500	500	-
	16	10	15	20	25	30	40	50	60	75	80	100												-	-
	20	10	15	20	25	30	40	50	60	75	80	100	125	150										-	-
	25	10	15	20	25	30	40	50	60	75	80	100	125	150										-	-
	32	10	15	20	25	30	40	50	60	75	80	100	125	150										-	-
	40	10	15	20	25	30	40	50	60	75	80	100	125	150										-	-
MTA	16	10	15	20	25	30	40	50	60	75	80	100												-	-
	20	10	15	20	25	30	40	50	60	75	80	100												-	-
	25	10	15	20	25	30	40	50	60	75	80	100												-	-
	32	10	15	20	25	30	40	50	60	75	80	100												-	-
	40	10	15	20	25	30	40	50	60	75	80	100												-	-

[Note] Consult us for non-standard stroke.

Inner structure and material of major parts

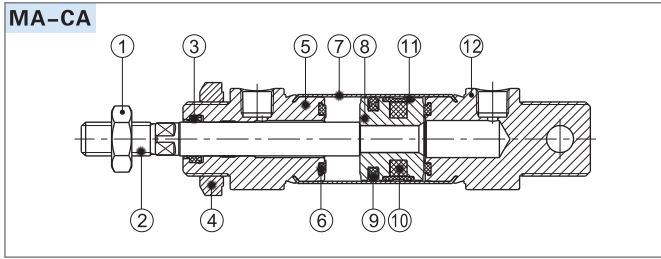


NO.	Item	Material
1	Rod nut	Stainless steel/Carbon steel
2	Piston rod	Carbon steel with 20 μ mchrome plated
3	Front cover packing	NBR
4	Front cover nut	Carbon steel
5	Front cover	Aluminum alloy
6	Bumper	TPU
7	Barrel	Stainless steel
8	Piston	Aluminum alloy
9	Piston seal	NBR
10	Magnet	Plastic
11	Wear ring	Wear resistant material
12	Back cover	Aluminum alloy

Dimensions


MA $\Phi 16 \sim \Phi 40$

MAC $\Phi 16 \sim \Phi 40$

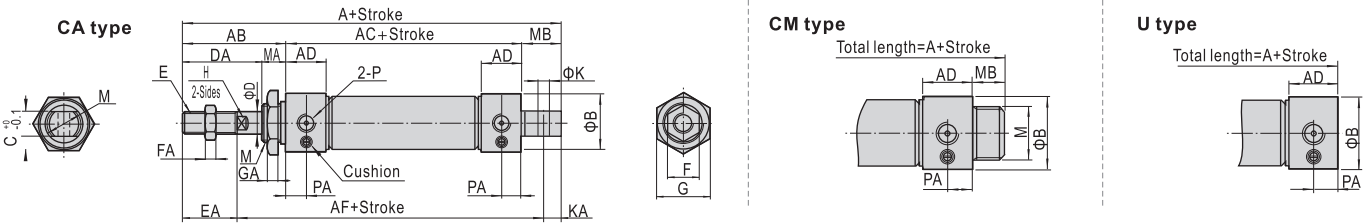

Bore size\Item Back cover	A																MB				P	PA				
	CA	CM	U	AB	AC	AD	AF	B	C	D	DA	E	EA	F	FA	G	GA	H	K	KA			M	MA	CA	CM
16	114	114	98	38	60	12.5	91	21	12	6	22	M6×1.0	16	10	5	22	6	5	6	7	M16×1.5	16	16	16	M5×0.8	7.5
20	137	128	116	40	76	16	108	27	16	8	28	M8×1.25	20	12	6	29	7	6	8	9	M22×1.5	12	21	12	1/8"	8
25	141	134	120	44	76	16	110	30	16	10	30	M10×1.25	22	17	6	29	7	8	8	9	M22×1.5	14	21	14	1/8"	8
32	147	134	120	44	76	16	113	35	16	12	30	M10×1.25	22	17	6	32	8	10	10	12	M24×2.0	14	27	14	1/8"	8
40	149	136	122	46	76	16.5	113	41.5	20	16	32	M12×1.25	24	17	7	41	8	14	12	12	M30×2.0	14	27	14	1/8"	9


MAC $\Phi 50 \setminus \Phi 63$

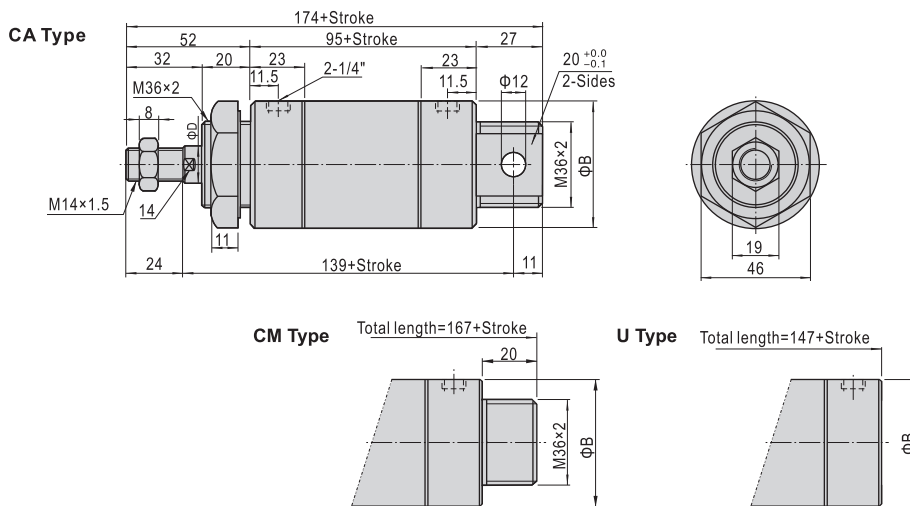


Bore size\Item	B	D
50	53	16
63	67	16

MSA $\Phi 16-\Phi 40$


CA Type

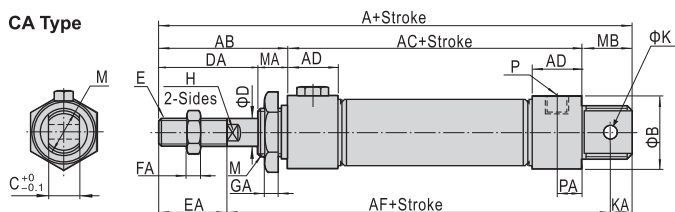

CM Type



U Type




Item	A									AB		AC			AD		AF		
	CA			CM			U			-	-	-	-	-	-	-	-	-	
Back cover	CA			CM			U			-	-	-	-	-	-	-	-	-	-
Bore size\Stroke	≤ 50	51~100	≥ 101	≤ 50	51~100	≥ 101	≤ 50	51~100	≥ 101	-	-	≤ 50	51~100	≥ 101	-	-	≤ 50	51~100	≥ 101
16	139	164	-	139	164	-	123	148	-	38	85	110	-	12.5	116	141	-	-	-
20	162	187	212	153	178	203	141	166	191	40	101	126	151	16	133	158	183	-	-
25	166	191	216	159	184	209	145	170	195	44	101	126	151	16	135	160	185	-	-
32	172	197	222	159	184	209	145	170	195	44	101	126	151	16	138	163	188	-	-
40	174	199	224	161	186	211	147	172	197	46	101	126	151	16.5	138	163	188	-	-


Bore size\Item	Back cover	B	C	D	DA	E	EA	F	FA	G	GA	H	K	KA	M	MA	MB		P	PA
		CA	CM																	
16		21	12	6	22	M6×1.0	16	10	5	22	6	5	6	7	M16×1.5	16	16	16	M5×0.8	7.5
20		27	16	8	28	M8×1.25	20	12	6	29	7	6	8	9	M22×1.5	12	21	12	1/8"	8
25		30	16	10	30	M10×1.25	22	17	6	29	7	8	8	9	M22×1.5	14	21	14	1/8"	8
32		35	16	12	30	M10×1.25	22	17	6	32	8	10	10	12	M24×2.0	14	27	14	1/8"	8
40		41.5	20	16	32	M12×1.25	24	17	7	41	8	14	12	12	M30×2.0	14	27	14	1/8"	9

MTA $\Phi 16-\Phi 40$


CA Type

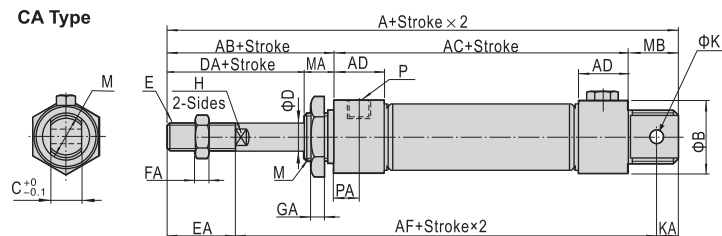

CM Type



U Type




Item	A												AC				AF			
	CA				CM				U				-		-		-		-	
Back cover	CA				CM				U				-		-		-		-	
Bore size\Stroke	≤ 25	≤ 50	≤ 75	≤ 100	≤ 25	≤ 50	≤ 75	≤ 100	≤ 25	≤ 50	≤ 75	≤ 100	≤ 25	≤ 50	≤ 75	≤ 100	≤ 25	≤ 50	≤ 75	≤ 100
16	129	139	154	164	129	139	154	164	113	123	138	148	75	85	100	110	106	116	131	141
20	152	162	177	187	143	153	168	178	131	141	156	166	91	101	116	126	123	133	148	158
25	156	166	181	191	149	159	174	184	135	145	160	170	91	101	116	126	125	135	150	160
32	162	172	192	202	149	159	179	189	135	145	165	175	91	101	121	131	128	138	158	168
40	164	174	194	204	151	161	181	191	137	147	167	177	91	101	121	131	128	138	158	168



Bore size\Item	Back cover	AB	AD	B	C	D	DA	E	EA	F	FA	G	GA	H	K	KA	M	MA	MB		P	PA
		CA	CM																			
16		38	12.5	21	12	6	22	M6×1.0	16	10	5	22	6	5	6	7	M16×1.5	16	16	16	M5×0.8	7.5
20		40	16	27	16	8	28	M8×1.25	20	12	6	29	7	6	8	9	M22×1.5	12	21	12	1/8"	8
25		44	16	30	16	10	30	M10×1.25	22	17	6	29	7	8	8	9	M22×1.5	14	21	14	1/8"	8
32		44	16	35	16	12	30	M10×1.25	22	17	6	32	8	10	10	12	M24×2.0	14	27	14	1/8"	8
40		46	16.5	41.5	20	16	32	M12×1.25	24	17	7	41	8	14	12	12	M30×2.0	14	27	14	1/8"	9

MAD/MACD

Φ 16~Φ 40

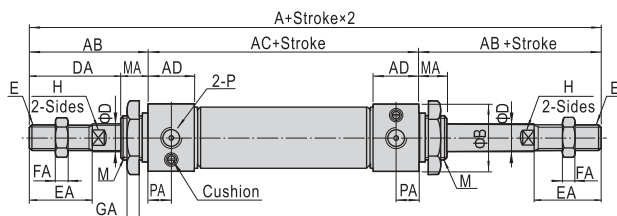


Φ50/Φ63

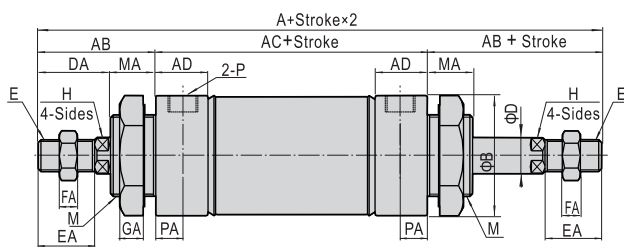


Bore size/Item	A	AB	AC	AD	B	D	DA	E	EA	F	FA	G	GA	H	M	MA	P	PA
16	136	38	60	12.5	21	6	22	M6 × 1.0	16	10	5	22	6	5	M16 × 1.5	16	M5 × 0.8	7.5
20	156	40	76	16	27	8	28	M8 × 1.25	20	12	6	29	7	6	M22 × 1.5	12	1/8"	8
25	164	44	76	16	30	10	30	M10 × 1.25	22	17	6	29	7	8	M22 × 1.5	14	1/8"	8
32	164	44	76	16	35	12	30	M10 × 1.25	22	17	6	32	8	10	M24 × 2.0	14	1/8"	8
40	168	46	76	16.5	41.5	16	32	M12 × 1.25	24	17	7	41	8	14	M30 × 2.0	14	1/8"	9
50	199	52	95	23	53	16	32	M14 × 1.5	24	19	8	46	11	14	M36 × 2.0	20	1/4"	11.5
63	199	52	95	23	67	16	32	M14 × 1.5	24	19	8	46	11	14	M36 × 2.0	20	1/4"	11.5

MAJ/MACJ

Φ 16~Φ 40

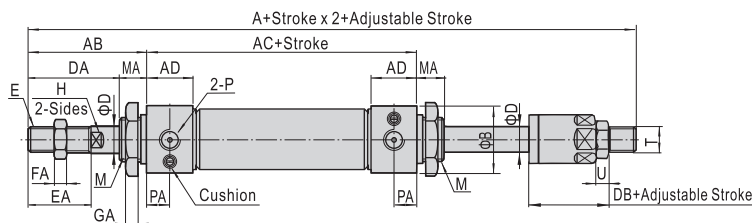


Φ50/Φ63

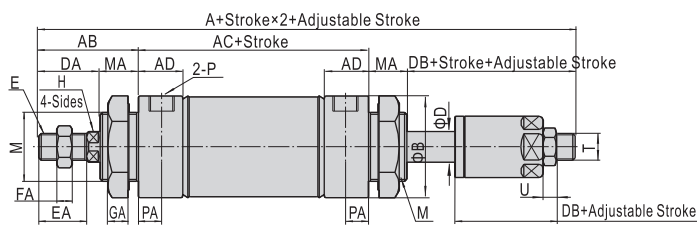

Bore size/Item	A	AB	AC	AD	B	D	DA	DB	E	EA	F	FA	H	M	MA	P	PA	G	GA	T	U
16	135	38	60	12.5	21	6	22	21	M6 × 1.0	16	10	5	5	M16 × 1.5	16	M5 × 0.8	7.5	22	6	M6 × 1.0	5
20	153	40	76	16	27	8	28	25	M8 × 1.25	20	12	6	6	M22 × 1.5	12	1/8"	8	29	7	M8 × 1.25	6
25	161	44	76	16	30	10	30	27	M10 × 1.25	22	17	6	8	M22 × 1.5	14	1/8"	8	29	7	M10 × 1.25	6
32	161	44	76	16	35	12	30	27	M10 × 1.25	22	17	6	10	M24 × 2.0	14	1/8"	8	32	8	M10 × 1.25	6
40	164	46	76	16.5	41.5	16	32	28	M12 × 1.25	24	17	7	14	M30 × 2.0	14	1/8"	9	41	8	M12 × 1.25	7
50	195	52	95	23	53	16	32	28	M14 × 1.5	24	19	8	14	M36 × 2.0	20	1/4"	11.5	46	11	M12 × 1.25	7
63	195	52	95	23	67	16	32	28	M14 × 1.5	24	19	8	14	M36 × 2.0	20	1/4"	11.5	46	11	M12 × 1.25	7

MARU(Up mounting type)

Φ 20~ Φ 40

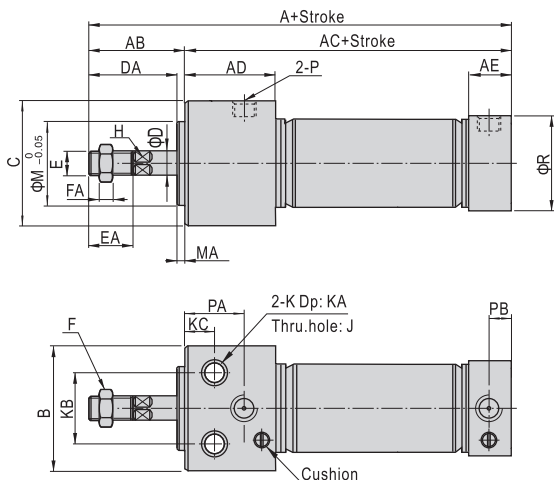


Bore size\Item	A	AB	AC	AD	AE	B	C	D	DA	E	EA	F	FA
20	120	31	89	29	16	33.5	30.5	8	28	M8 × 1.25	20	13	5
25	122	33	89	29	16	39	36.5	10	30	M10 × 1.25	22	17	6
32	122	33	89	29	16	47	42.5	12	30	M10 × 1.25	22	17	6
40	132.5	35	97.5	37.5	16.5	58.5	52.5	16	32	M14 × 1.5	24	19	8

Bore size\Item	H	J	K	KA	KB	KC	M	MA	P	PA	PB	R
20	6	Φ5.5	Φ9.5	6.5	21	12	20	3	1/8"	22	8	27
25	8	Φ6.5	Φ11.0	7.5	25	12	26	3	1/8"	22	8	30
32	10	Φ9.0	Φ14.0	10	30	12	26	3	1/8"	22	8	35
40	14	Φ11	Φ17.5	12.5	38	15	32	3	1/8"	27	9	41.5

MARF(Front mounting type)


Φ 20~ Φ 40

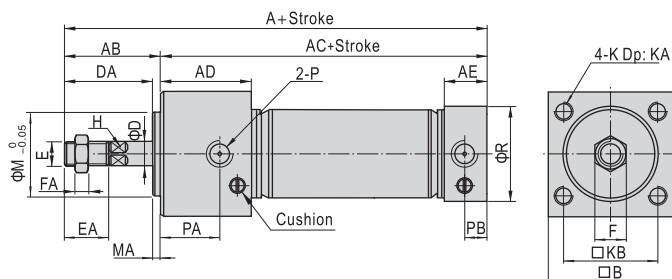

Bore size\Item	A	AB	AC	AD	AE	B	D	DA	E	EA
20	120	31	89	29	16	30.5	8	28	M8 × 1.25	20
25	122	33	89	29	16	36.5	10	30	M10 × 1.25	22
32	122	33	89	29	16	42.5	12	30	M10 × 1.25	22
40	132.5	35	97.5	37.5	16.5	52.5	16	32	M14 × 1.5	24


Bore size\Item	F	FA	H	K	KA	KB	M	MA	P	PA	PB	R
20	13	5	6	M5 × 0.8	9	22	20	3	1/8"	22	8	27
25	17	6	8	M6 × 1.0	11	26	26	3	1/8"	22	8	30
32	17	6	10	M6 × 1.0	11	30	26	3	1/8"	22	8	35
40	19	8	14	M8 × 1.25	14	36	32	3	1/8"	27	9	41.5

Φ50/Φ63

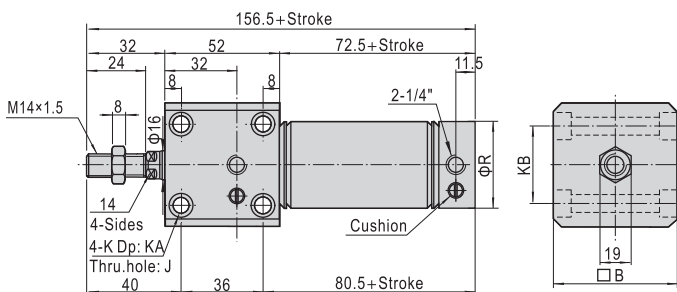

Bore size\Item	B	J	K	KA	KB	R
50	62	Φ6.5	2-Sides: Φ11.0	6.5	44	53
63	74	Φ9.0	2-Sides: Φ14.0	8.5	48	67

Φ50/Φ63

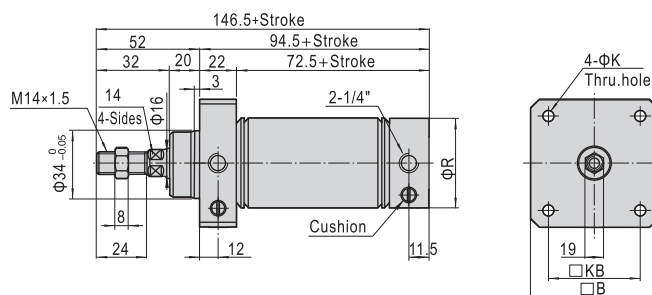

Bore size\Item	B	K	KB	R
50	62	6.5	48	53
63	74	9.0	58	67

List for ordering code of accessories

Accessories Bore size	Mounting accessories			Knuckle				Sensor switch	
	LB	FA	SDB	I	Y	F	U	CMSG	DMSG(S)
16	F-MA16LB	F-MA16FA	F-MA16SDB	F-MA16I	F-MA16Y	F-M6X100F	F-M6X100U	CMSG	DMSG(S)
20	F-MA20LB	F-MA20FA	F-MA20SDB	F-MA20I	F-MA20Y	F-M8X125F	F-M8X125U		
25									
32	F-MA32LB	F-MA32FA	F-MA32SDB	F-MA25I	F-MA25Y	F-M10X125F	F-M10X125U		
40	F-MA40LB	F-MA40FA		F-MA40I	F-MA40Y	F-M12X125F	F-M12X125U		
50	F-MA50LB	F-MA50FA	F-MA40SDB						
63	F-MA63LB			F-MAC50I	F-MAC50Y	F-M14X150F	F-M14X150U		

Accessory selection

Accessories Cylinder model	Mounting accessories			Knuckle[Note1]				Sensor switch	
	LB	FA	SDB	I	Y	U	F	CMSG	DMSG(S)
MA\MAC	●	●	●	●	●	●	●	●	●
MSA\MTA	●	●	●	●	●	●	●	●	●
MAD\MACD	●	●	×	●	●	●	●	●	●
MAJ\MACJ	●	●	×	●	●	●	●	●	●
MARF\MARU	×	×	×	●	●	●	●	●	●

Material of accessories


Accessories Bore size	Mounting accessories			Knuckle			
	LB	FA	SDB	I	Y	F	U
16~63	○	○	○	□	□	□	□

○—Lower carbon steel; □—Carbon steel;

[Note1] Please refer to P349~352 for knuckle detail.

Dimensions


LB

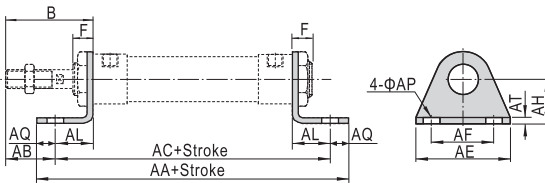

Bore size\Item Stroke	AA	AA(MSA)			AC	AC(MSA)		
	(MA/MAC)	0~50	51~100	101~150	(MA/MAC)	0~50	51~100	101~150
16	98	123	148	-	86	111	136	-
20	122	147	172	197	106	131	156	181
25	122	147	172	197	106	131	156	181
32	142	167	192	217	126	151	176	201
40	142	167	192	217	126	151	176	201
50	175	-	-	-	151	-	-	-
63	183	-	-	-	157	-	-	-


Bore size\Item Stroke	B	F	AB	AE	AF	AL	AQ	AP	AT	AH
16	38	16	25	44	32	13	6	5.5	2.5	20
20	40	12	25	54	40	15	8	6.5	3	25
25	44	14	29	54	40	15	8	6.5	3	25
32	44	14	19	59	45	25	8	7	3.5	32
40	46	14	21	64	50	25	8	7	3.5	36
50	52	20	24	86	66	28	12	11	4.5	40
63	52	20	21	106	82	31	13	11	4.5	45

FA

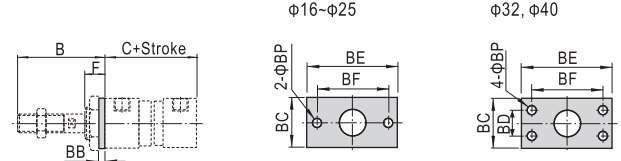

Bore size\Item Stroke	B	C	C(MSA)			BB	BC	BD	BE	BF	BP	F
	(MA/MAC)	0~50	51~100	101~150								
16	38	60	85	110	-	3	26	-	52	40	5.5	16
20	40	76	101	126	151	3.5	38	-	64	50	7	12
25	44	76	101	126	151	3.5	38	-	64	50	7	14
32	44	76	101	126	151	4	47	33	72	58	6.5	14
40	46	76	101	126	151	4	50	36	84	70	6.5	14
50	54	147				4.5	65	47	104	86	9	22
63	54	147				4.5	65	47	104	86	9	22


SDB

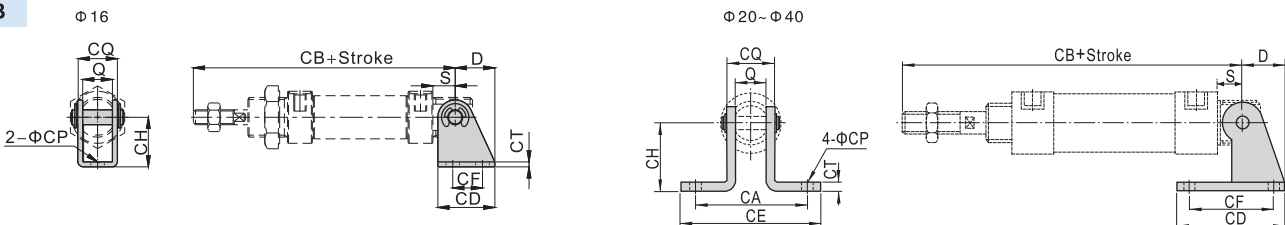


Bore size\Item Stroke	D	S	Q	CA	CB	CB(MSA)			CD	CE	CF	CH	CT	CP	CQ
	(MA)	0~50	51~100	101~150											
16	16	9	12	-	107	132	157	-	23	-	12	20	2	5.5	16
20	21	12	16	51	128	153	178	203	48	67	32	32	2.5	7	21
25	21	12	16	51	132	157	182	207	48	67	32	32	2.5	7	21
32	27	15	16	51	135	160	185	210	52	67	36	36	3	7	22
40	27	15	20	55	137	162	187	212	56	71	40	40	3	7	26

[Note] SDB is attached with relevant PIN.

I Knuckle




Type\Item	NC	ND	NE	NF	NG	NH	NM
F-MA16I	5	21	28	8.5	8	M6×1.0	6
F-MA20I	8	30	40	11	15	M8×1.25	8
F-MA25I	10	40	50	15	20	M10×1.25	10
F-MA40I	10	45	57	16	23	M12×1.25	14




Type\Item	NA	NB	NC	ND	NE	NF	NG	NH	NJ	NK	NI
F-MAC50I	52.5	50	12.5	22	21	19	13.8	10	19	40	M14×1.5


Y Knuckle

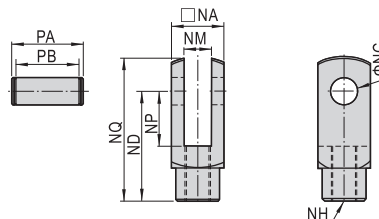

Type\Item	NA	NC	ND	NP	NQ	NM	NH	PA	PB
F-MA16Y	12	5	21	8.5	27.4	6	M6×1.0	16.8	12.4
F-MA40Y	25.4	10	45	20	57	14	M12×1.25	32	26.2



Type\Item	A	B	C	D	E	F	G	H	I
F-MA20Y	42	32	16	16	M8×1.25	14	21	8	8
F-MA25Y	52	40	20	19	M10×1.25	18	25	10	10

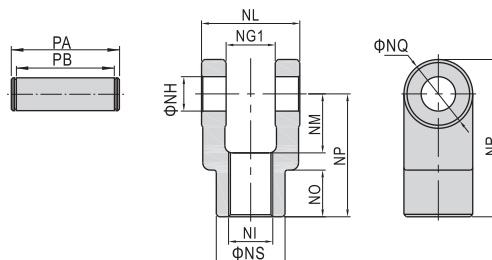

Type\Item	Ng1	NH	NI	NL	NM	NO	NP	NQ	NR	NS	PA	PB
F-MAC50Y	14.2	10	M14×1.5	27.8	19	17	40	22	51	22	34.6	28.8